


Follow these general instructions to install an MS-DOS application driver:

1. With the MS-DOS SVGA Accelerator drivers diskette in Drive A, type a: at the operating system prompt and press <ENTER>.
2. Type install and press <ENTER>  
The INSTALL command displays the main menu, listing the software drivers available on the diskette.

The INSTALL Screen:

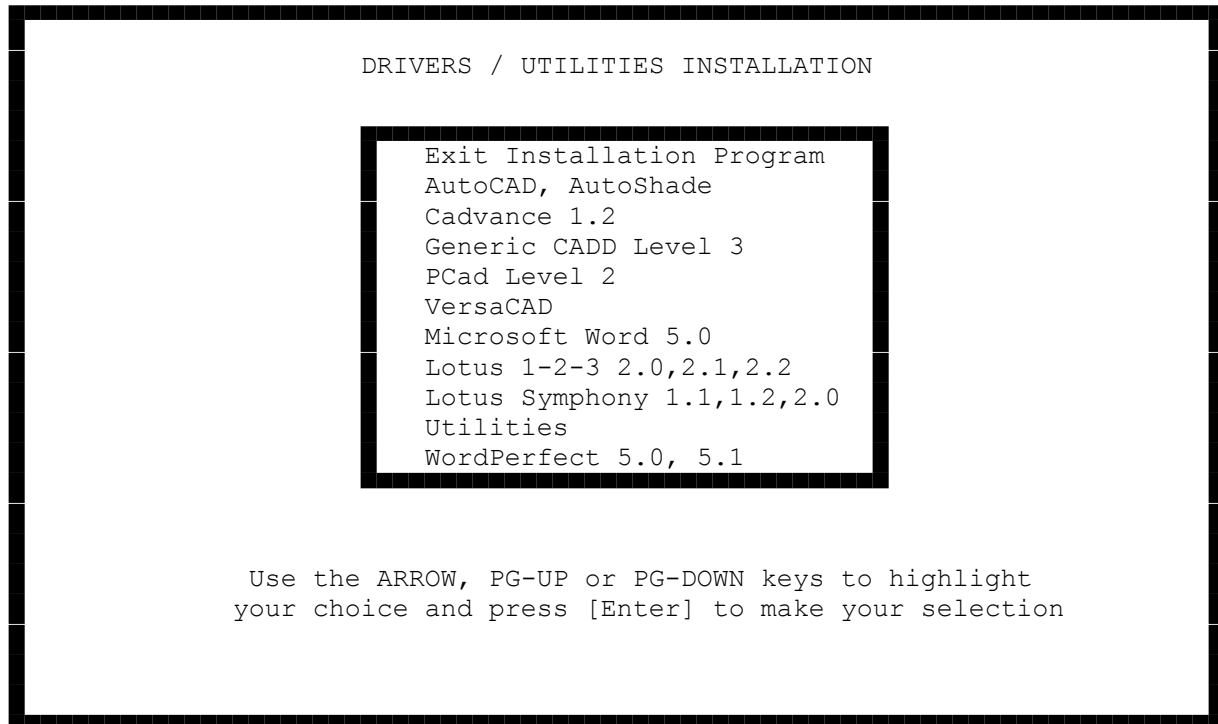

3. Use the arrow keys to scroll down and highlight the application driver you wish to install. Press <ENTER>.
4. Select the driver you wish to install, and follow the instructions on the screen. When finished, INSTALL returns you to the main menu.
5. Install other drivers from the menu, if necessary, or select Exit Installation Program to return to the operating system prompt.

Note: VGAMODE.EXE and VESA.EXE are installed from the Utilities menu.

Faxback Document # 2324 will provide specific details on using VGAMODE.EXE

Faxback Document # 2332 will provide specific details on using VESA.EXE

Note: We recommend making a backup copy of the drivers diskettes, using the MS-DOS diskcopy command.

README.TXT Files:

Located on the SVGA Accelerator Drivers diskettes are README.TXT files that

provide additional information concerning the MS-DOS, Windows, and OS/2 driver options. To display or print the files, insert the diskette into drive A; at the operating system prompt, type a: and press <ENTER> and then type README or PRINTME and press <ENTER>. Below is a listing of what information is on each disk:

Disk #1	MS-DOS drivers information	31 page printout
Disk #2	Windows drivers information	7 page printout
Disk #3	OS/2 drivers information	1 page printout

(rjs-05/21/93)