


The DMP-202 has four print function (DIP) switches on the printed circuit board inside the printer. These switches control various features of your printer. For the switch functions, see the following table "DIP Switch Print Functions."

DIP SWITCH PRINT FUNCTIONS

SWITCH	SYMBOL	ON	OFF
1	CR	Carriage Return and Line feed. (CR = CR + LF)	Carriage Return Only (CR = CR only)
2	LF	Line Feed and Carriage Return (LF = LF + CR)	Line Feed Only (LF = LF only)
3	AGM * Mode	Valid	Invalid
4	Character	IBM Character Set 2	IBM Character Set 1

* AGM: Alternate Graphics Mode

The default switch settings are shown below.

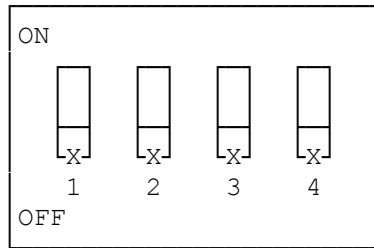

NOTE: Turn off the printer before you change any of the switches.

(dtc-07/26/93)

□